
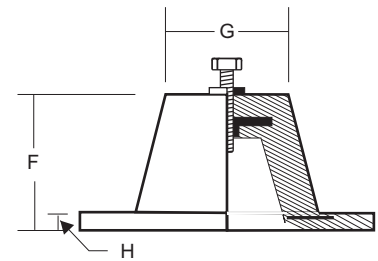
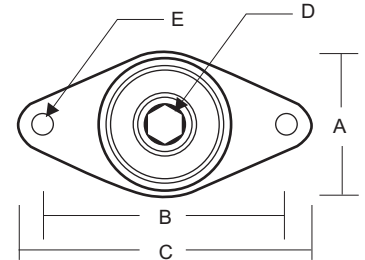


DURADUCT®

A. V. FLOOR MOUNT

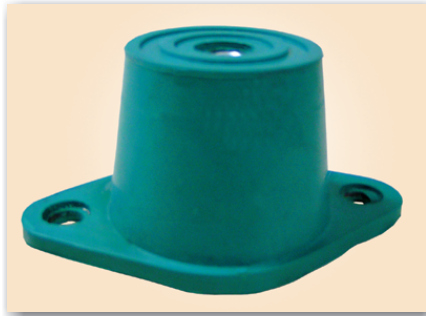

Product Feature

- * Suitable for Mounting on Floor.
- * Ribbed / Non skid design used for providing grip with the surface. But it is recommended to fasten the product for better results.
- * Steel re-enforced Rubber for better strength.
- * Threading provided at top for fastening.
- * Material : EDPM Neoprene
- * FMC & FMD are rectangle base type

ITEM CODE	MAX LOAD KG	DEFLECTION MM	DIMENSIONS								COLOUR
			A	B	C	D	E	F	G	H	
FMA 15	15	8	45	60	80	6	8.5	32	35	5	Blue
FMA 20	20	8	45	60	80	6	8.5	32	35	5	Red
FMA 30	30	8	45	60	80	6	8.5	32	35	5	Green
FMA 50	50	8	45	60	80	6	8.5	32	35	5	Black
FMB 60	60	10	60	76	98	10	8.5	45	45	5.5	Blue
FMB 75	75	10	60	76	98	10	8.5	45	45	5.5	Red
FMB 100	100	10	60	76	98	10	8.5	45	45	5.5	Green
FMB 175	175	10	60	76	98	10	8.5	45	45	5.5	Black
FMC 90	90	12	60	80	102	10	12	50	45	6.5	Blue
FMC 125	125	12	60	80	102	10	12	50	45	6.5	Red
FMC 175	175	12	60	80	102	10	12	50	45	6.5	Green
FMC 225	225	12	60	80	102	10	12	50	45	6.5	Black
FMD 350	350	12	92	120	150	12	14	90	70	10	Blue
FMD 450	450	12	92	120	150	12	14	90	70	10	Red
FMD 600	600	12	92	120	150	12	14	90	70	10	Green
FMD 1000	1000	12	92	120	150	12	14	90	70	10	Black

NOTE : * RESEARCH & DEVELOPMENT IS A CONTINUOUS PROCESS WITH US. AS IMPROVEMENTS ARE MADE FROM TIME TO TIME, SPECIFICATIONS / DIMENSIONS MAY CHANGE WITHOUT NOTICE.
* TOLERANCES IN DIMENSIONS ARE AS PER INTERNATIONAL STANDARDS.



RICHFIELD®
GROUP OF COMPANIES

205 / 206, Morya House, Veera Industrial Estate,
Off New Link Road, Andheri (W), Mumbai 400 053. INDIA.
Tel. : 91-22-2673 3171 /2673 2947 Fax : + 91-22-2673 3147
E-mail : abasrani@rediffmail.com